

INSTALLATION MANUAL

**CAT.2 (LOW GLARE LUMINAIRE 16 CELLS
 COMPACT FLUORESCENT LUMINAIRE)**

- PLL 236
- PLL 336



INSTALLATION NOTICE


Warning

- Please follow all the installation manual carefully. Any improper installation will cause burn, electrical shock and lamp malfunction.
- Please do not modify or change the actual part of the lamp
- Please ensure the incoming supply voltage in valid rating.
- If the lamp malfunction, please cut off the supply and call the qualified technician or the related store which sell this product.
- Please do not close this product with sound or heat prove material.
- Please do not install this product near to the inflammable material.




Notice


- Please do not install this product under direct sun reflected area, enclose with vaporized material & vibrating area.
- Please cut off the supply during the maintenance work.

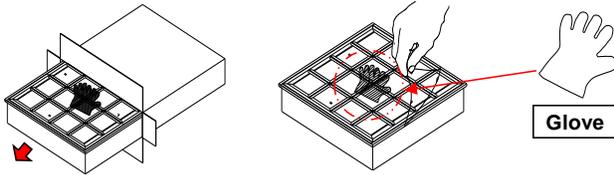


Step 1: Take out the lamp frame from the box in a proper way and remove the hand glove from the bottom of the plastic cover.

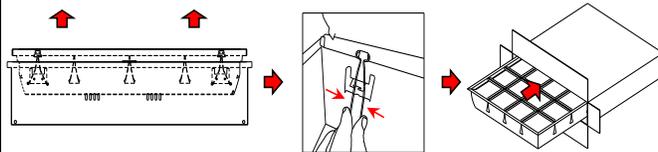


Step 2: Press the v-clip to release the louver from lamp frame and place it inside the box until the other installation processes are finished.




Step 4: Enter the supply cable to the prepared connector



Step 5: Peel the protective film from the surface of the louver.

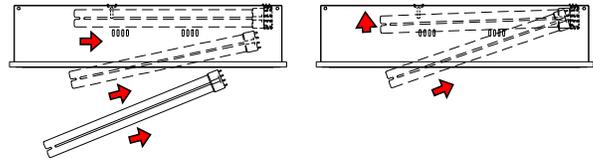


Step 6: Fix lamp to the lamp holder properly.

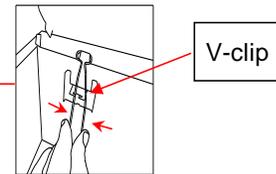

Step 7: Make sure that the v-clip is pressed in order to push it inside the v-clip holder.



Step 8: After all the four clips are pressed, push the right side of the louver in to the lamp frame and followed by the left side. Then push the whole louver into the lamp frame.

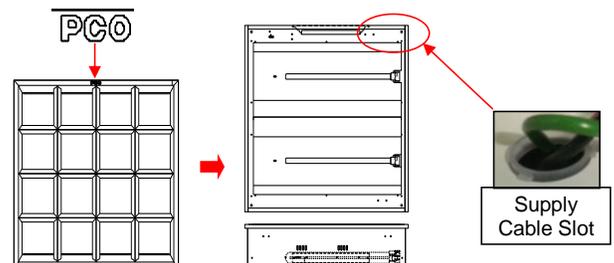


Step 9: The illustration shows a lamp frame which is finished installed and the location of PCO logo (Emboss I downward) should be parallel with the supply cable's

Step 3: Place the lamp frame inside the ceiling and make sure it is fitted properly.


location of ECO logo (Emboss upward) should be parallel with the supply cable hole.

Maintenance Notice




V-clip

Step 1: Press the v-clip to release the louver from lamp frame and place it inside the box until the other installation processes are finished.

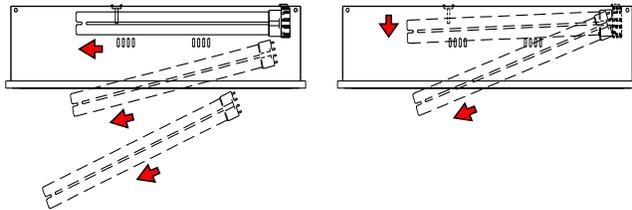

Step 2: Detach the lamp properly from its holder.

Electronic Ballast

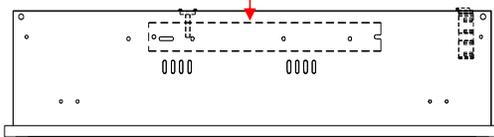

Step 3: Replace the ballast if there are any damages recognized and make sure that all the wires are fixed again according to the existing wiring. The wiring diagram on the ballast can be referred for this purpose. Conduct a light test before reattach the louver.